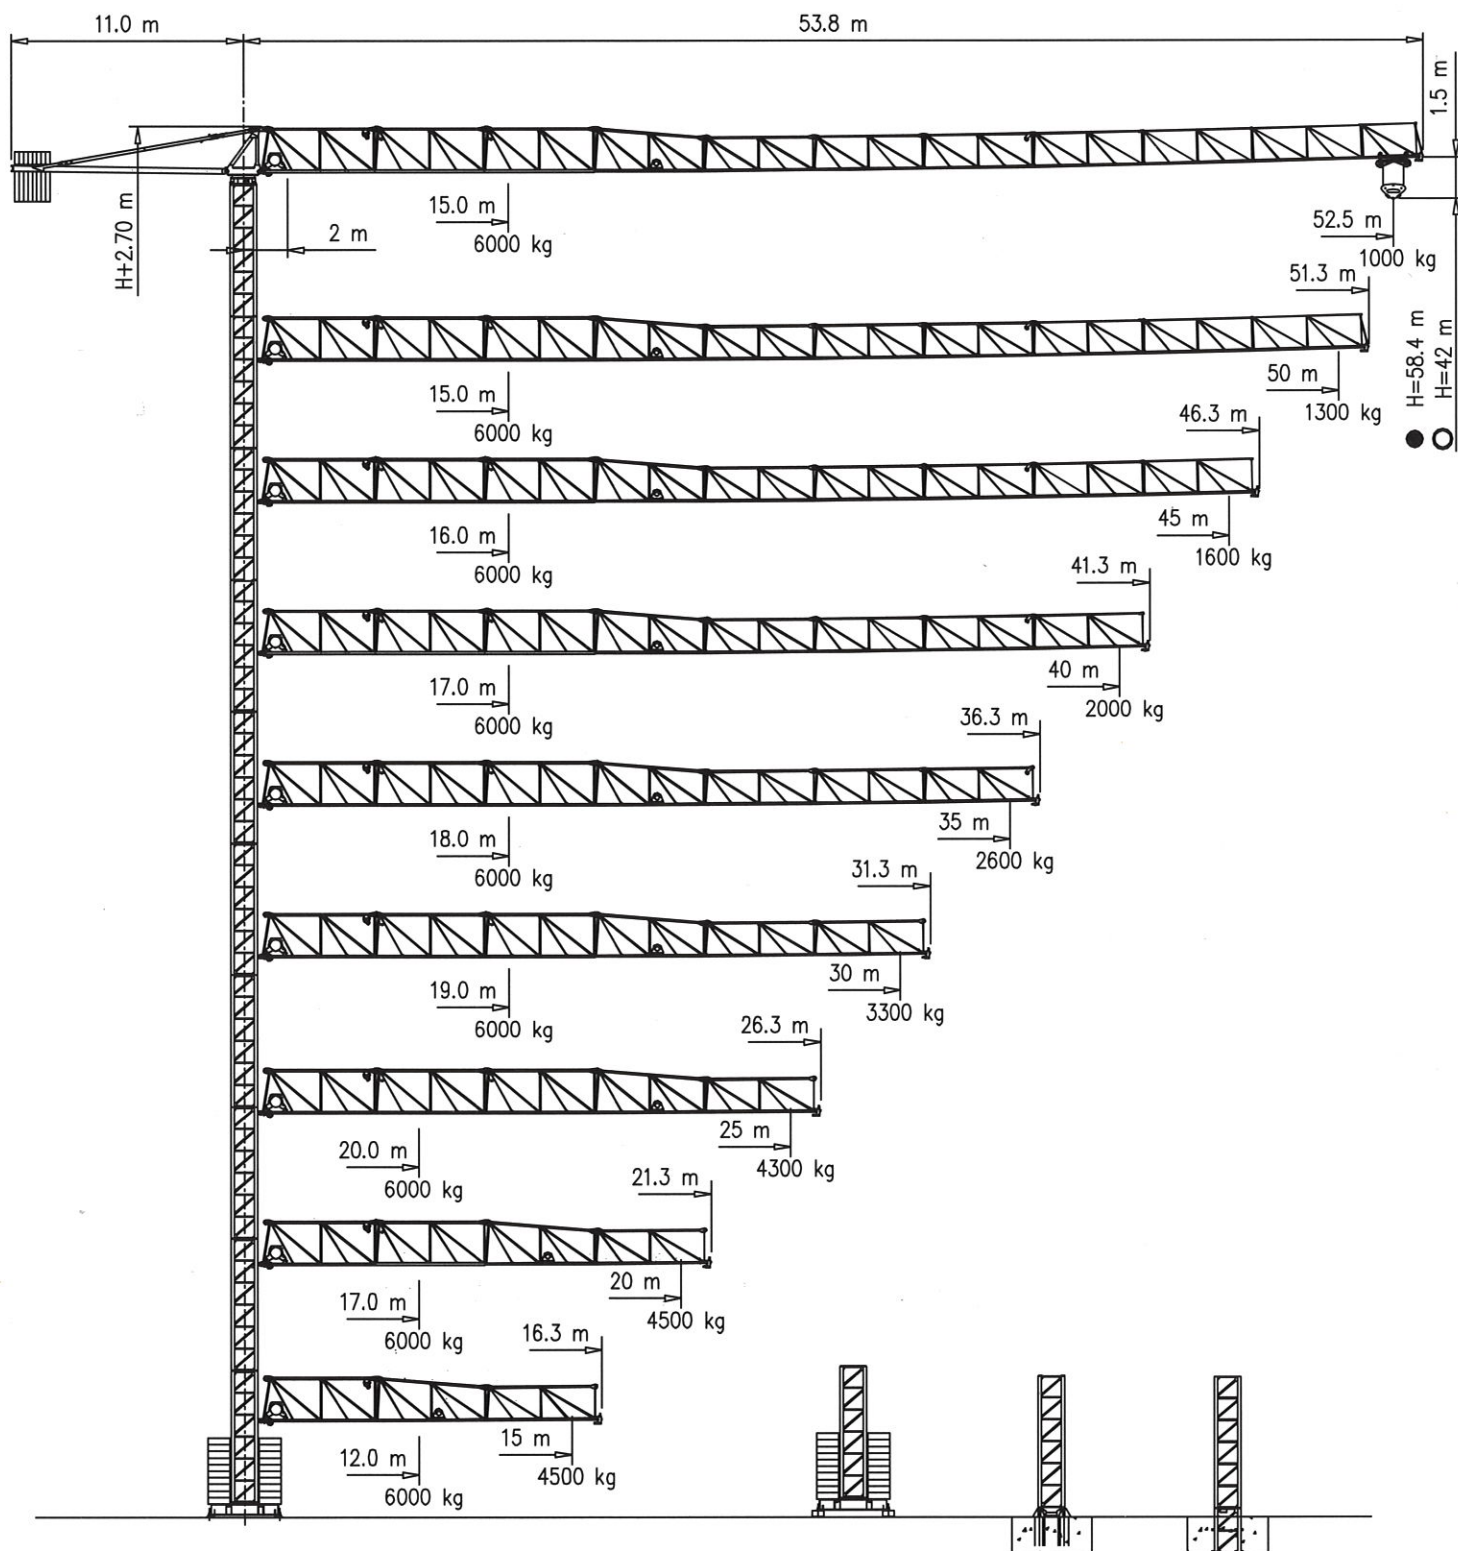
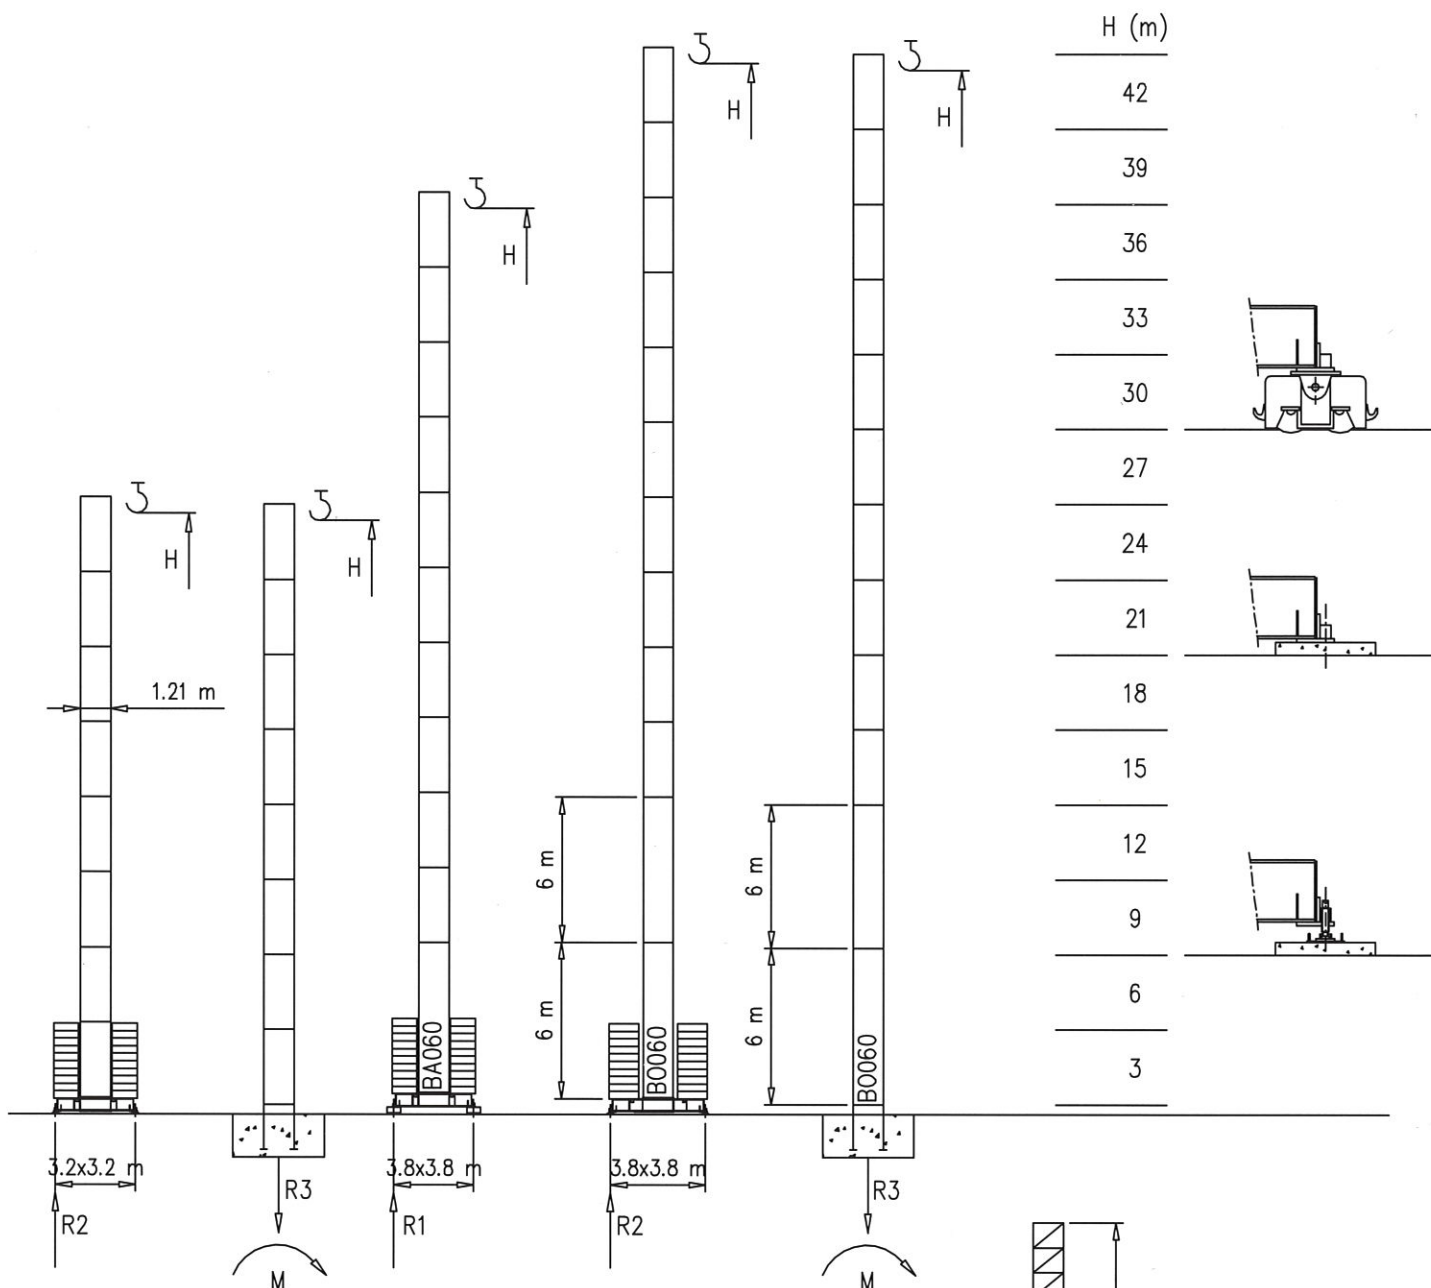





S1210

 15 m $\longrightarrow$ 52.5 m




H=37-42 m		H=24-36 m		H=0-23 m	
R1		R1	53 t	R1	49 t
R2	69 t	R2	53 t	R2	47 t
R3	40 t	R3	25.6 t	R3	22 t
M	185 tm	M	116 tm	M	80 tm

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



H	n°	Tot.
0-24 m	18 B	54000 kg
24-36 m	20 B	60000 kg
36-42 m	24 B	72000 kg

	A	B
L	3.6m	4.0m
k	0.3m	1.2m
d	1.15m	0.19m

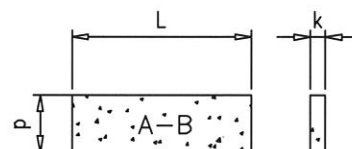

S1700

15 m → 52.5 m

H1 (m)

58.4

54.5

50.6

46.7

42.8

38.9

35

31.1

27.2

23.3

19.4

15.5

11.6

7.7

H (m)

53.4

49.5

45.6

41.7

37.8

33.9

30

26.1

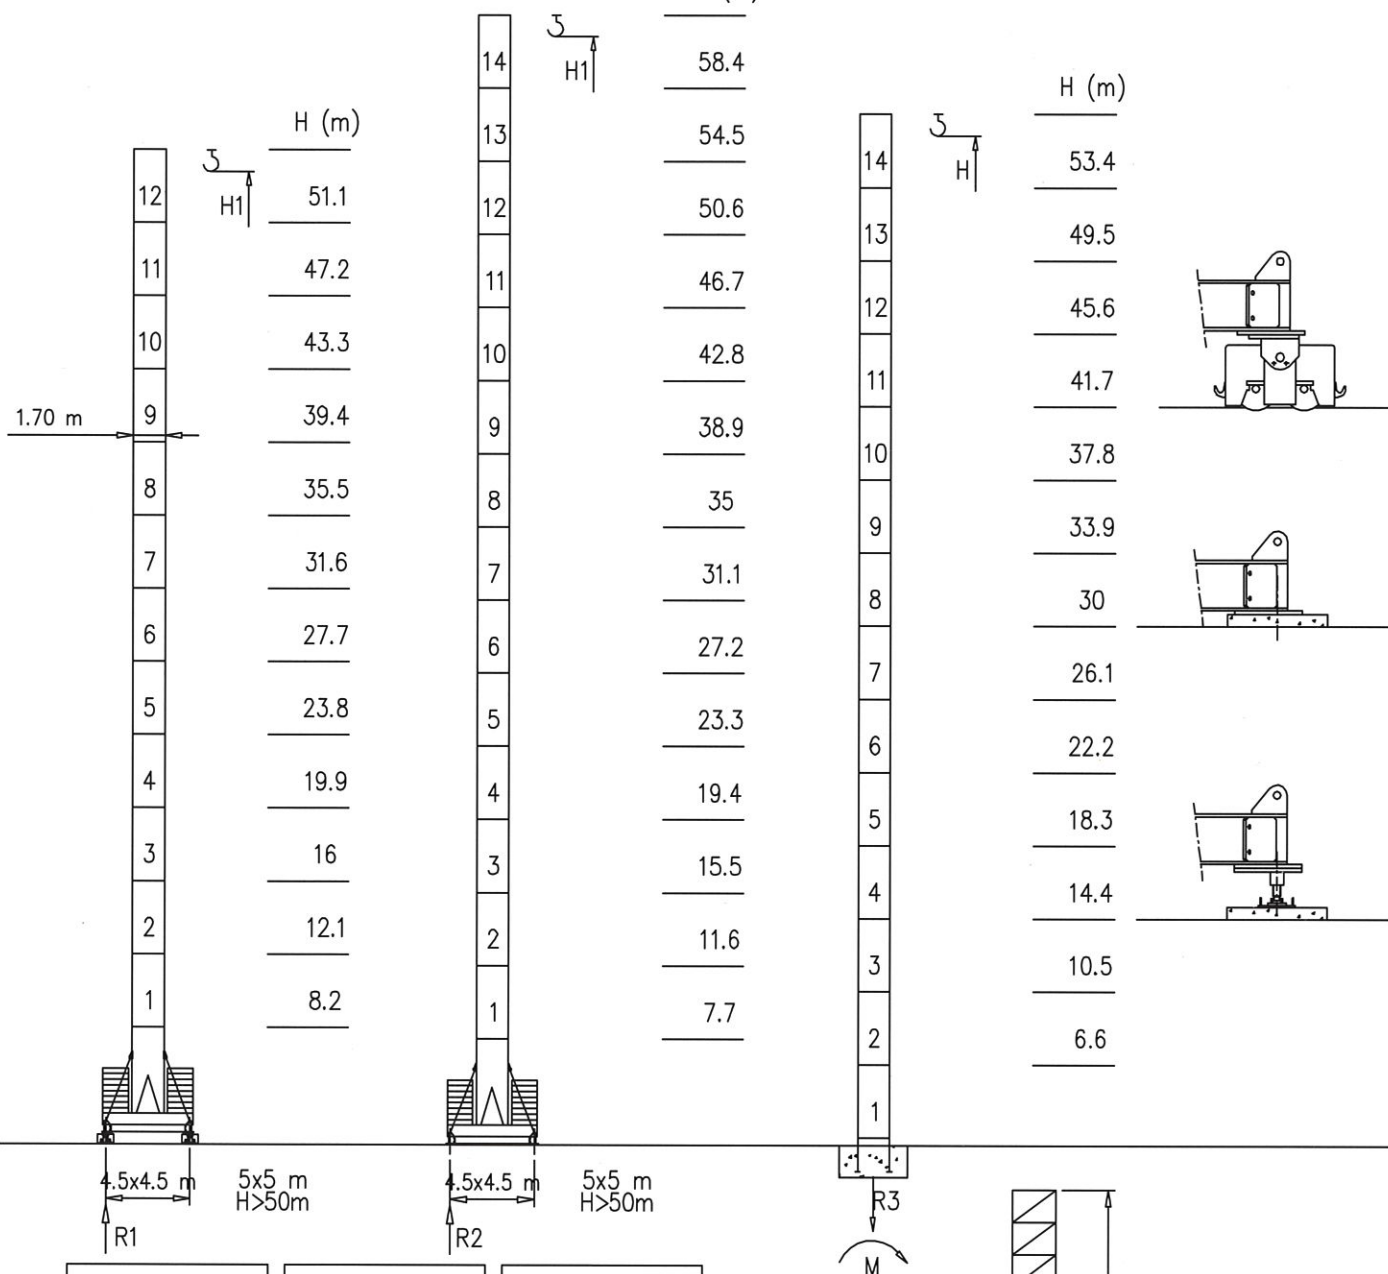
22.2

18.3


14.4

10.5



6.6



Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



















H	n°	Tot.
0-35 m	2C+ 18D	60800 kg
36-45 m	2C+ 22D	72000 kg
46-58 m	2C+ 32D	105000 kg















Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

Pmax 3000 kg

	14400 kg		2	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	m
			3000	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300	1000	kg
	14400 kg		2	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50		m
			3000	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300		kg
	12000 kg		2		29	32.5	35	37.5	40	42.5	45				m
			3000		3000	2600	2370	2170	2000	1820	1600				kg
	10800 kg		2		30	32.5	35	37.5	40						m
			3000		3000	2790	2540	2250	2000						kg
	10800 kg		2			32.5	35								m
			3000			3000	2600								kg
	9600 kg		2		30										m
			3000		3000										kg
	8400 kg		2		25										m
			3000		3000										kg
	7200 kg		2		20										m
			3000		3000										kg
	4800 kg		2		15										m
			3000		3000										kg



Pmax 6000/3000 kg




	14400 kg		2	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	m
			6000	6000	5075	4350	3810	3360	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300	1000	kg
	14400 kg		2	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50		m
			6000	6000	5075	4350	3810	3360	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300		kg
	12000 kg		2	16	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45				m
			6000	6000	5350	4600	4050	3550	3190	2870	2600	2370	2170	2000	1820	1600				kg
	10800 kg		2		17	20	22.5	25	27.5	30	32.5	35	37.5	40						m
			6000		6000	4900	4300	3800	3410	3070	2790	2540	2250	2000						kg
	10800 kg		2		18	20	22.5	25	27.5	30	32.5	35								m
			6000		6000	5380	4720	4180	3750	3380	3000	2600								kg
	9600 kg		2		19	20	22.5	25	27.5	30										m
			6000		6000	5690	4990	4430	3800	3300										kg
	8400 kg		2			20	22.5	25												m
			6000			6000	5280	4300												kg
	7200 kg		2		17	20														m
			6000		6000	4500														kg
	4800 kg		2	12	15															m
			6000	6000	4500															kg




X (m)	kg
3,2x3,2	2300kg
3,8x3,8	4500kg
4,5x4,5	3800kg

S1210	
(m)	(kg)
3	840
6	1500
12	2950

S1700	
(m)	(kg)
3,9	1650
5,2	2250
11,7	4490

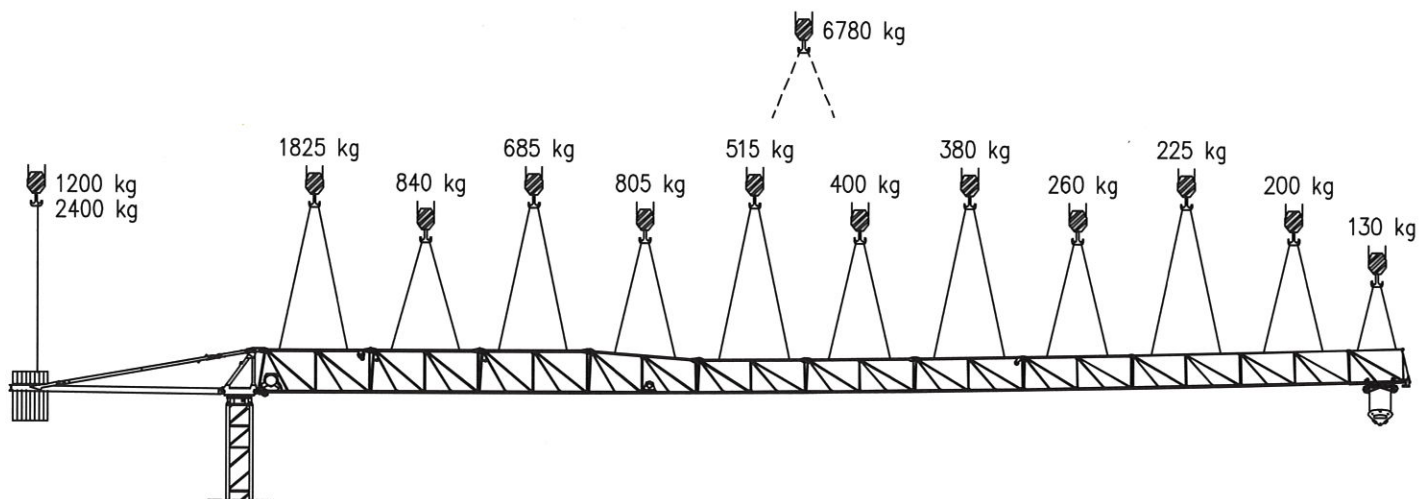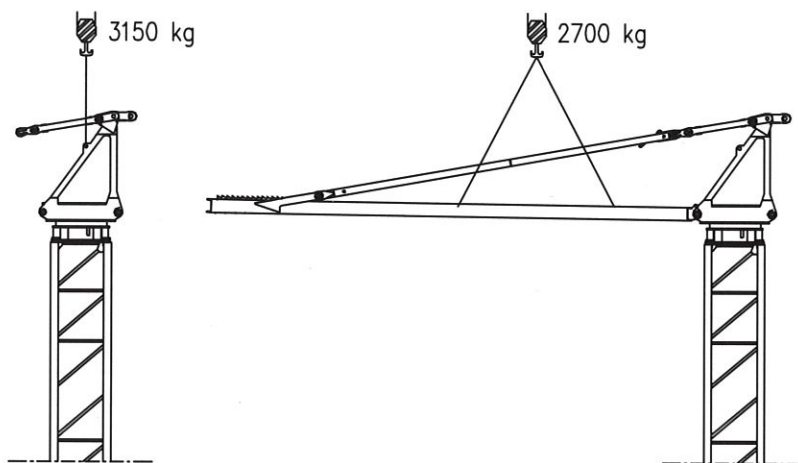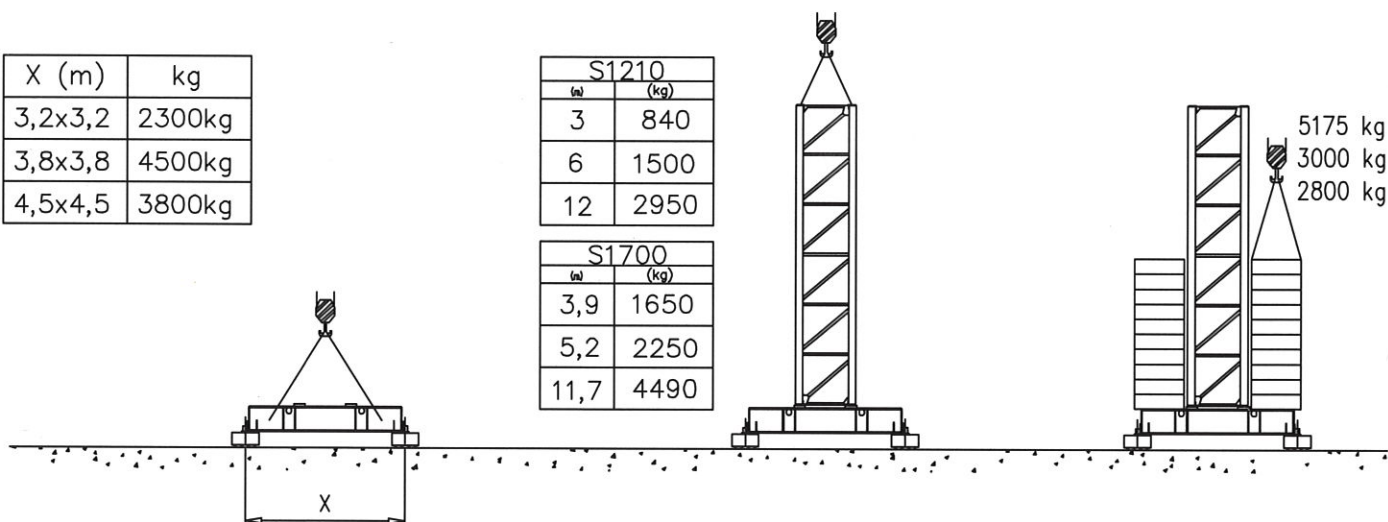

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos

Sollevamento V20.40 Hoisting Levage Heben Elevaci�n Eleva�ao			1a	4 m/min	3000 kg	14.7 kW	V20.40 28 kVA
			2a	20 m/min	3000 kg		
			3a	40 m/min	1500 kg		
			1a	2 m/min	6000 kg		
			2a	10 m/min	6000 kg		
			3a	20 m/min	3000 kg		
Sollevamento V25.60 Hoisting Levage Heben Elevaci�n Eleva�ao			1a	7 m/min	3000 kg	18.5 kW	V25.60 33 kVA
			2a	28 m/min	3000 kg		
			3a	56 m/min	1500 kg		
			1a	3.5 m/min	6000 kg		
			2a	14 m/min	6000 kg		
			3a	28 m/min	3000 kg		
Carrello Trolleying Distribution Katzfahren Distribuci�n Distribui�ao			1a	OP 5 m/min	6000 kg	3 kW	Potenza elettrica necessaria Puissance �lectrique n�cessaire Necessary electric power Anschlusswert – Potencia
			2a	25 m/min	6000 kg		
			3a	50 m/min	3000 kg		
Rotazione Slewing Orientation Schwenken Orientaci�n Rota�ao			1a	0 � 0.2	giri/min tr/min rp/min	4.4 kW @ 1200rpm n� 2 x 2.2 kW	
			2a	0 � 0.6			
			3a	0 � 0.9			
Traslazione Travelling Translation Kranfahren Traslaci�n Transla�ao			1a	OP 0 � 5		3.7 kW	
			2a	0 � 20			

SPALENZA s.r.l.

MACCHINE e ATTREZZATURE EDILI

Uffici e Magazzini:

Via Garibaldi, 40 - 25086 REZZATO (BS)

Tel. 030.2792054 - 030.2792283 - Fax 030.2792369

Cod. Fisc. e Part. I.V.A. n.: 03586600177

Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica 400V – 50 Hz



FMgru s.r.l.

Via Emilia 11-29010 Pontenure PC ITALY
tel. 0523/510446 ric.aut. fax 0523/510365
www.fmgru.com e-mail: info@fmgru.com

FEM 1.001

2000/14/CE



Documento commerciale non contrattuale
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

This commercial document is not legally
binding. For any technical information, please
refer to the corresponding instructions.

Documento commercial no contractual
Para cualquier información técnica,
ver la noticia correspondiente.

Code: 15ICA37T30A0		
Ed.	Data	Rev Data
1	15.04.04	2 16.03.06